

## Satellite anchors




1. Satellite anchors are composed of by Nylon plug & Wood screw(Coach screws);
2. It can be composed of Nylon plug or Rimmed Nylon plug + Wood screws with Different size Satisfy customer need;

### Nylon plug and Rimmed Specification

Plug size	Screws size	Drill bits Size
4*20MM	2~2.5*20~25MM	4MM
5*25MM	2.5~3*25~30MM	5MM
6*30MM	3~4*30~35MM	6MM
7*35MM	3.5~4.5*35~40MM	7MM
8*40MM	4~5.5*40~45MM	8MM
10*50MM	5~6.5*50~60MM	10MM
12*60MM	6~8*60~65MM	12MM
14*75MM	7~10*75~80MM	14MM

### Wood screws(Coach screws) Specification:

1. Sandard: DIN571;
2. Carbon steel, White or Blue or Blue white zinc plated;
3. Grade: 4.8; 8.8 10.9; 12.9;

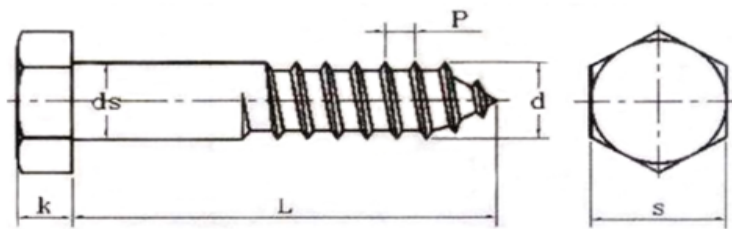

Thread size		4	5	5	(7)	8	10	12	16	20
ds	max. =nominal size	4	5	6	7	8	10	12	16	20
	min	3.52	4.52	5.52	6.42	7.42	9.42	11.3	15.3	19.3
da	max	5	6	7.2	8.2	10.2	12.2	15.2	19.2	24.4
k	Nominal size	2.8	3.5	4	5	5.5	7	8	10	13
	max	3.1	3.88	4.38	5.38	5.88	7.45	8.45	10.45	13.9
	min	2.5	3.13	3.63	4.63	5.13	6.55	7.55	9.55	12.1
s	Nominal size	7	8	10	12	13	17	19	24	30
	max	7	8	10	12	13	17	19	24	30
	min	6.64	7.64	9.64	11.57	12.57	16.57	18.48	23.16	29.16
e	min	7.5	8.63	10.89	13.07	14.2	18.72	20.88	26.17	32.95